



DONIFLON® 2030 is structurally enhanced PTFE gasket sheet filled with barium sulfate. It has outstanding chemical resistance to various media, same as DONIFLON® 900E; especially recommended for strong alkaline solutions under moderate temperatures and hydrofluoric acid (up to 48%). This material has enhanced creep performance compared to plain PTFE material. It is the ideal gasket material for equipment where higher bolt loads are required.

## PROPERTIES

	MECHANICAL RESISTANCE		THERMAL RESISTANCE	SEALABILITY PERFORMANCE	CHEMICAL RESISTANCE
SUPERIOR	-		-	■	■
EXCELLENT	-		-	■	■
VERY GOOD	■	■	■	■	■
GOOD	■	■	■	■	■
MODERATE	■	■	■	■	■

## APPROPRIATE INDUSTRIES & APPLICATIONS

- POTABLE WATER SUPPLY
- STEAM SUPPLY
- GAS SUPPLY
- CHEMICAL INDUSTRY
- PETROCHEMICAL INDUSTRY
- PHARMACEUTICAL INDUSTRY
- FOOD INDUSTRY
- PAPER AND CELLULOSE INDUSTRY
- REFRIGERATION AND COOLING
- COMPRESSORS AND PUMPS
- VALVES


Composition	PTFE, barium sulfate
Color	Off-white
Approvals	Please inquire

## TECHNICAL DATA Typical values for 2 mm thickness

<b>Density</b>	DIN 28090-2	g/cm <sup>3</sup>	3.0
<b>Compressibility</b>	ASTM F36J	%	6
<b>Recovery</b>	ASTM F36J	%	40
<b>Tensile strength</b>	ASTM F152	MPa	10
<b>Stress resistance</b>	DIN 52913		
30 MPa, 150 °C, 16 h		MPa	13
<b>Specific leak rate</b>	DIN 3535-6	mg/[s·m]	0.002
<b>pH range</b>			0-14
<b>Operating conditions</b>			
Minimum temperature		°C/°F	-200/-328
Maximum temperature		°C/°F	260/500
Pressure		bar/psi	80/1160

## P-T DIAGRAM

EN 1514-1, Type IBC, PN 40, DIN 28091-2 / 3.8, 2.0 mm

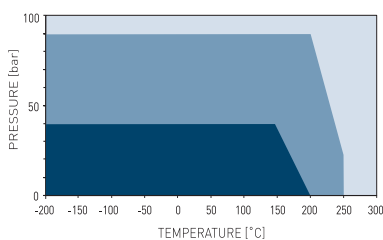

- General suitability - Under common installation practices and chemical compatibility
- Conditional suitability - Appropriate measures ensure maximum performance for joint design and gasket installation. Technical consultation is recommended
- Limited suitability - Technical consultation is mandatory

**P-T diagram** indicates the maximum permissible combination of internal pressure and service temperature which can be simultaneously applied for a given gasket's thickness, size and tightness class. Given the wide variety of gasket applications and service conditions, these values should only be regarded as a guidance for the proper gasket assembly. In general, thinner gaskets exhibit better P-T properties.

Sheet dimensions

Size (mm): 1500 x 1500  
 Thickness (mm): 1.5 | 2.0 | 3.0  
 Other sizes and thicknesses available on request

Acetamide	+	Dioxane	+	Oleic acid	+
Acetic acid, 10%	+	Diphytl (Dowtherm A)	+	Oleum (Sulfuric acid, fuming)	-
Acetic acid, 100% (Glacial)	+	Esters	+	Oxalic acid	+
Acetone	+	Ethane (gas)	+	Oxygen (gas)	+
Acetonitrile	+	Ethers	+	Palmitic acid	+
Acetylene (gas)	+	Ethyl acetate	+	Paraffin oil	+
Acid chlorides	+	Ethyl alcohol (Ethanol)	+	Pentane	+
Acrylic acid	+	Ethyl cellulose	+	Perchloroethylene	+
Acrylonitrile	+	Ethyl chloride (gas)	+	Petroleum (Crude oil)	+
Adipic acid	+	Ethylene (gas)	+	Phenol (Carbolic acid)	+
Air (gas)	+	Ethylene glycol	+	Phosphoric acid, 40%	+
Alcohols	+	Formaldehyde (Formalin)	+	Phosphoric acid, 85%	+
Aldehydes	+	Formamide	+	Phthalic acid	+
Alum	+	Formic acid, 10%	+	Potassium acetate	+
Aluminium acetate	+	Formic acid, 85%	+	Potassium bicarbonate	+
Aluminium chlorate	+	Formic acid, 100%	+	Potassium carbonate	+
Aluminium chloride	+	Freon-12 (R-12)	+	Potassium chloride	+
Aluminium sulfate	+	Freon-134a (R-134a)	+	Potassium cyanide	+
Amines	+	Freon-22 (R-22)	+	Potassium dichromate	+
Ammonia (gas)	+	Fruit juices	+	Potassium hydroxide	o
Ammonium bicarbonate	+	Fuel oil	+	Potassium iodide	+
Ammonium chloride	+	Gasoline	+	Potassium nitrate	+
Ammonium hydroxide	+	Gelatin	+	Potassium permanganate	+
Amyl acetate	+	Glycerine (Glycerol)	+	Propane (gas)	+
Anhydrides	+	Glycols	+	Propylene (gas)	+
Aniline	+	Helium (gas)	+	Pyridine	+
Anisole	+	Heptane	+	Salicylic acid	+
Argon (gas)	+	Hydraulic oil (Glycol based)	+	Seawater/brine	+
Asphalt	+	Hydraulic oil (Mineral type)	+	Silicones (oil/grease)	+
Barium chloride	+	Hydraulic oil (Phosphate ester based)	+	Soaps	+
Benzaldehyde	+	Hydrazine	+	Sodium aluminate	o
Benzene	+	Hydrocarbons	+	Sodium bicarbonate	+
Benzoic acid	+	Hydrochloric acid, 10%	+	Sodium bisulfite	+
Bio-diesel	+	Hydrochloric acid, 37%	+	Sodium carbonate	+
Bio-ethanol	+	Hydrofluoric acid, 10%	+	Sodium chloride	+
Black liquor	+	Hydrofluoric acid, 48%	+	Sodium cyanide	+
Borax	+	Hydrogen (gas)	+	Sodium hydroxide	o
Boric acid	+	Iron sulfate	+	Sodium hypochlorite (Bleach)	+
Butadiene (gas)	+	Isobutane (gas)	+	Sodium silicate (Water glass)	+
Butane (gas)	+	Isooctane	+	Sodium sulfate	+
Butyl alcohol (Butanol)	+	Isoprene	+	Sodium sulfide	+
Butyric acid	+	Isopropyl alcohol (Isopropanol)	+	Starch	+
Calcium chloride	+	Kerosene	+	Steam	+
Calcium hydroxide	+	Ketones	+	Stearic acid	+
Carbon dioxide (gas)	+	Lactic acid	+	Styrene	+
Carbon monoxide (gas)	+	Lead acetate	+	Sugars	+
Cellulose	+	Lead arsenate	+	Sulfur	+
Chlorine (gas)	+	Magnesium sulfate	+	Sulfur dioxide (gas)	+
Chlorine (in water)	+	Maleic acid	+	Sulfuric acid, 20%	+
Chlorobenzene	+	Malic acid	+	Sulfuric acid, 98%	o
Chloroform	+	Methane (gas)	+	Sulfuryl chloride	+
Chloroprene	+	Methyl alcohol (Methanol)	+	Tar	+
Chlorosilanes	+	Methyl chloride (gas)	+	Tartaric acid	+
Chromic acid	+	Methylene dichloride	+	Tetrahydrofuran (THF)	+
Citric acid	+	Methyl ethyl ketone (MEK)	+	Thionyl chloride	+
Copper acetate	+	N-Methyl-pyrrolidone (NMP)	+	Titanium tetrachloride	o
Copper sulfate	+	Milk	+	Toluene	+
Creosote	+	Mineral oil (ASTM no.1)	+	2,4-Toluenediisocyanate	+
Cresols (Cresylic acid)	+	Motor oil	+	Transformer oil (Mineral type)	+
Cyclohexane	+	Naphtha	+	Trichloroethylene	+
Cyclohexanol	+	Nitric acid, 10%	+	Vinegar	+
Cyclohexanone	+	Nitric acid, 65%	+	Vinyl chloride (gas)	+
Decalin	+	Nitrobenzene	+	Vinylidene chloride	+
Dextrin	+	Nitrogen (gas)	+	Water	+
Dibenzyl ether	+	Nitrous gases (NOx)	+	White spirits	+
Dibutyl phthalate	+	Octane	+	Xylenes	+
Dimethylacetamide (DMA)	+	Oils (Essential)	+	Xylenol	+
Dimethylformamide (DMF)	+	Oils (Vegetable)	+	Zinc sulfate	+

## CHEMICAL RESISTANCE CHART

The recommendations made here are intended as a guideline for the selection of a suitable gasket type. As the function and durability of products are dependent upon a number of factors, the data may not be used to support any warranty claims. If there are specific type-approval regulations, these have to be complied with.

- + Recommended |
- o Recommendation depends on operating conditions |
- Not recommended |



Head office:  
 DONIT TESNIT, d.o.o.

Cesta komandanta Staneta 38  
 1215 Medvode, Slovenia, EU

Phone: +386 (0)1 582 33 00

Fax: +386 (0)1 582 32 06  
 +386 (0)1 582 32 08

Web: www.donit.eu

E-mail: info@donit.eu

For disclaimer please visit <http://donit.eu/disclaimer/>  
 Copyright © DONIT TESNIT, d.o.o.  
 All rights reserved  
 Date of issue: 08.2020 / TDS-2030-09-2019

All information and data quoted are based upon decades of experience in the production and use of sealing elements. This data may not be used to support any warranty claims. With its publication this latest edition supersedes all previous issues and is subject to change without further notice.