




TESNIT® BA-REM

TESNIT® BA-REM has excellent thermomechanical properties (resistance to high internal and surface pressure and blowout), which make it suitable for the highly demanding industries of steam supply and shipbuilding.



PROPERTIES

	MECHANICAL RESISTANCE	THERMAL RESISTANCE	CHEMICAL RESISTANCE
SUPERIOR			
EXCELLENT			
VERY GOOD			
GOOD			SEALABILITY PERFORMANCE
MODERATE			

APPROPRIATE INDUSTRIES & APPLICATIONS

	STEAM SUPPLY
	POWER PLANT
	PETROCHEMICAL INDUSTRY
	HIGH TEMP. APPLICATIONS SHIPBUILDING

Composition	Glass and arimid fibres, inorganic fillers, NBR binder, expanded galvanized steel reinforcement		
Color	Green		
Approvals	Please inquire		


TECHNICAL DATA

Typical values for a thickness of 1.5 mm

Density	DIN 28090-2	g/cm ³	2.2
Compressibility	ASTM F36J	%	7
Recovery	ASTM F36J	%	50
Tensile strength	ASTM F152	MPa	35
Stress resistance	DIN 52913		
50 MPa, 175 °C, 16 h		MPa	43
50 MPa, 300 °C, 16 h		MPa	38
Specific leak rate	DIN 3535-6	mg/(s·m)	/
Thickness increase	ASTM F146		
Oil IRM 903, 150 °C, 5 h		%	5
ASTM Fuel B, 23 °C, 5 h		%	8
Compression modulus	DIN 28090-2		
At room temperature: ϵ_{KSW}		%	6.5
At elevated temperature: $\epsilon_{WSW/200\text{ }^{\circ}\text{C}}$		%	5.8
Creep relaxation	DIN 28090-2		
At room temperature: ϵ_{KRW}		%	3.2
At elevated temperature: $\epsilon_{WRW/200\text{ }^{\circ}\text{C}}$		%	0.5
Max. operating conditions			
Peak temperature		°C/°F	460/860
Continuous temperature		°C/°F	370/698
- with steam		°C/°F	250/482
Pressure		bar/psi	150/2175

P-T DIAGRAM

EN 1514-1, Type IBC, PN 40, DIN 28091-2 / 3.8, 2.0 mm

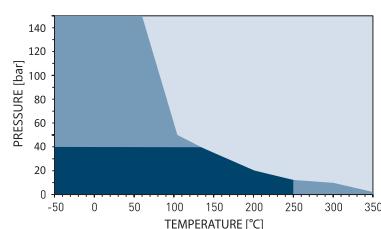

- General suitability - Under common installation practices and chemical compatibility.
- Conditional suitability - Appropriate measures ensure maximum performance for joint design and gasket installation. Technical consultation is recommended.
- Limited suitability - Technical consultation is mandatory.

P-T diagram indicates the maximum permissible combination of internal pressure and service temperature which can be simultaneously applied for a given gasket's thickness, size and tightness class. Given the wide variety of gasket applications and service conditions, these values should only be regarded as a guidance for the proper gasket assembly. In general, thinner gaskets exhibit better P-T properties.

Surface finish	Standard: 4AS. Optional: graphite or PTFE
Sheet dimensions	Size [mm]: 1000 x 1500 1500 x 1500 Thickness [mm]: 1.0 1.5 2.0 3.0 Other sizes and thicknesses available on request
Tolerances	On length and width: ± 5 % On thickness up to 1.0 mm: ± 0.1 mm On thickness above 1.0 mm: ± 10 %

Acetamide	+	Dioxane	-
Acetic acid, 10%	-	Diphyl [Dowtherm A]	+
Acetic acid, 100% (Glacial)	-	Esters	○
Acetone	○	Ethane [gas]	+
Acetonitrile	-	Ethers	○
Acetylene [gas]	+	Ethyl acetate	○
Acid chlorides	-	Ethyl alcohol [Ethanol]	+
Acrylic acid	-	Ethyl cellulose	○
Acrylonitrile	-	Ethyl chloride [gas]	-
Adipic acid	-	Ethylene [gas]	+
Air [gas]	+	Ethylene glycol	+
Aldehydes	○	Formaldehyde [Formalin]	○
Alum	○	Formamide	○
Aluminium acetate	-	Formic acid, 10%	-
Aluminium chlorate	-	Formic acid, 85%	-
Aluminium chloride	-	Formic acid, 100%	-
Aluminium sulfate	-	Freon-12 [R-12]	+
Amines	-	Freon-134a [R-134a]	+
Ammonia [gas]	○	Freon-22 [R-22]	○
Ammonium bicarbonate	+	Fruit juices	+
Ammonium chloride	-	Fuel oil	+
Ammonium hydroxide	+	Gasoline	+
Amyl acetate	○	Gelatin	+
Anhydrides	-	Glycerine [Glycerol]	+
Aniline	-	Glycols	+
Anisole	○	Helium [gas]	+
Argon [gas]	+	Heptane	+
Asphalt	+	Hydraulic oil [Glycol based]	+
Barium chloride	-	Hydraulic oil [Mineral type]	+
Benzaldehyde	-	Hydraulic oil [Phosphate ester based]	○
Benzene	+	Hydrazine	-
Benzoic acid	○	Hydrochloric acid, 10%	-
Bio-diesel	+	Hydrochloric acid, 37%	-
Bio-ethanol	+	Hydrofluoric acid, 10%	-
Black liquor	-	Hydrofluoric acid, 48%	-
Borax	+	Hydrogen [gas]	+
Boric acid	-	Iron sulfate	-
Butadiene [gas]	+	Isobutane [gas]	+
Butane [gas]	+	Isooctane	+
Butyl alcohol [Butanol]	+	Isoprene	+
Butyric acid	-	Isopropyl alcohol [Isopropanol]	+
Calcium chloride	-	Kerosene	+
Calcium hydroxide	+	Ketones	○
Carbon dioxide [gas]	+	Lactic acid	-
Carbon monoxide [gas]	+	Lead acetate	-
Cellosolve	○	Lead arsenate	-
Chlorine [gas]	-	Magnesium sulfate	+
Chlorine [in water]	-	Maleic acid	-
Chlorobenzene	○	Malic acid	-
Chloroform	-	Methane [gas]	+
Chloroprene	○	Methyl alcohol [Methanol]	+
Chlorosilanes	-	Methyl chloride [gas]	○
Chromic acid	-	Methylene dichloride	○
Citric acid	-	Methyl ethyl ketone [MEK]	○
Copper acetate	-	N-Methyl-pyrrolidone [NMP]	○
Copper sulfate	-	Milk	+
Creosote	○	Mineral oil [ASTM no.1]	+
Cresols [Cresylic acid]	-	Motor oil	+
Cyclohexane	+	Naphtha	+
Cyclohexanol	+	Nitric acid, 10%	-
Cyclohexanone	○	Nitric acid, 65%	-
Decalin	+	Nitrobenzene	-
Dextrin	+	Nitrogen [gas]	+
Dibenzyl ether	○	Nitrous gases [NOx]	-
Diethyl phthalate	○	Octane	+
Dimethylacetamide [DMA]	○	Oils [Essential]	+
Dimethylformamide [DMF]	○	Oils [Vegetable]	+

All information and data quoted are based upon decades of experience in the production and operation of sealing elements. This data may not be used to support any warranty claims. With its publication this latest edition supersedes all previous issues and is subject to change without further notice.

CHEMICAL RESISTANCE CHART

The recommendations made here are intended as a guideline for the selection of a suitable gasket type. As the function and durability of products are dependent upon a number of factors, the data may not be used to support any warranty claims. If there are specific type-approval regulations, these have to be complied with.

- ⊕ Recommended
- Recommendation depends on operating conditions
- Not recommended



DONIT TESNIT, d.o.o.

Cesta komandanta Staneta 38
1215 Medvode, Slovenia, EU

Phone: +386 (0)1 582 33 00
Fax: +386 (0)1 582 32 06
+386 (0)1 582 32 08

Web: www.donit.eu
E-mail: info@donit.eu

For disclaimer please visit <http://donit.eu/disclaimer/>
Copyright © DONIT TESNIT, d.o.o.

All rights reserved

Date of issue: 06.2020 / TDS-BAREM-05-2015