















GRAFILIT® SL is an expanded graphite based material with stainless steel foil insert, thus facilitating its handling and enhances the surface load. GRAFILIT® SL has excellent chemical and thermal resistance. Its high creep resistance and high compressibility make it suitable for highly demanding conditions in the chemical and petrochemical industries.

PROPERTIES

	THERMAL RESISTANCE		
	MECHANICAL RESISTANCE	SEALABILITY PERFORMANCE	CHEMICAL RESISTANCE
SUPERIOR			
EXCELLENT			
VERY GOOD			
GOOD			
MODERATE			

APPROPRIATE INDUSTRIES & APPLICATIONS

-  WATER SUPPLY
-  POTABLE WATER SUPPLY
-  STEAM SUPPLY
-  GAS SUPPLY
-  CHEMICAL INDUSTRY
-  PETROCHEMICAL INDUSTRY
-  POWER PLANT
-  REFRIGERATION AND COOLING
-  HEATING SYSTEMS
-  HIGH TEMP. APPLICATIONS
-  COMPRESSORS AND PUMPS
-  VALVES

Composition	Expanded natural graphite (>99% graphite purity), stainless steel foil insert (AISI 316; 0.05 mm)
Color	Black
Approvals	BAM (Oxygen)


TECHNICAL DATA

Typical values for a thickness of 1.5 mm


Density	DIN 28090-2	g/cm ³	1.3
Compressibility	ASTM F36A	%	42
Recovery	ASTM F36A	%	15
Stress resistance	DIN 52913		
16 h, 50 MPa, 300 °C		MPa	49
Specific leak rate	DIN 3535-6	mg/(s·m)	0.05
Leachable chloride content	FSA NMG 202	ppm	20
Leachable fluoride content	FSA NMG 203	ppm	20
Ash content of graphite	DIN 51903	%	<1
Compression modulus	DIN 28090-2		
At room temperature: ϵ_{KSW}		%	38
At elevated temperature: $\epsilon_{WSW/300}^{\circ C}$		%	1.2
Percentage creep relaxation	DIN 28090-2		
At room temperature: ϵ_{KRW}		%	4.3
At elevated temperature: $\epsilon_{WRW/300}^{\circ C}$		%	3.6
Operating conditions			
Minimum temperature		°C/°F	-200/-328
Continuous temperature			
- oxidizing atmosphere		°C/°F	550/1022
- reducing or inert atmosphere		°C/°F	700/1292
Pressure			
- Demanding gasses		bar/psi	60/870
- Steam, gasses		bar/psi	100/1450
- Liquids		bar/psi	140/2030

P-T DIAGRAMS


Demanding gasses

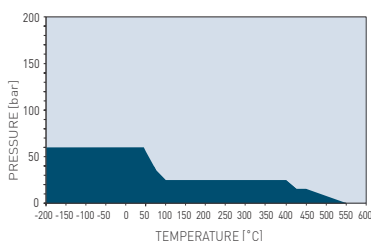

Steam, gasses

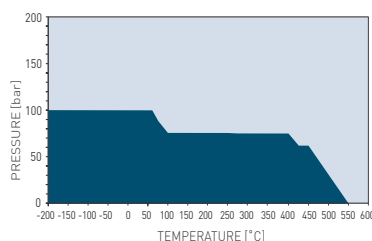

Liquids

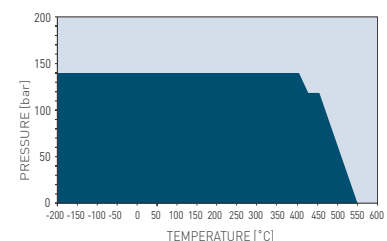

P-T DIAGRAMS

EN 1514-1, Type IBC, PN 40, DIN 28091-2 / 3.8, 1.5 mm

P-T diagrams indicate the maximum permissible combination of internal pressure and service temperature which can be simultaneously applied for a given gasket according its material type, thickness, size and tightness class. Given the wide variety of gasket applications and service conditions, these values should only be regarded as guidance for the proper gasket assembly. In general, thinner gaskets exhibit better P-T properties.

- General suitability - Under common installation practices and chemical compatibility.
- Limited suitability - Technical consultation is mandatory.

CHEMICAL RESISTANCE CHART

The recommendations made here are intended as a guideline for the selection of a suitable gasket type. As the function and durability of products are dependent upon a number of factors, the data may not be used to support any warranty claims.

Legend: + Recommended, ? Recommendation depends on operating conditions, - Not recommended.

Acetamide	+	Butyric acid	+	Formic acid, 85%	?	N-Methyl-pyrrolidone (NMP)	+	Silicones (oil/grease)	+
Acetic acid, 10%	+	Calcium chloride	?	Formic acid, 100%	?	Milk	+	Soaps	+
Acetic acid, 100% (Glacial)	?	Calcium hydroxide	+	Freon-12 (R-12)	+	Mineral oil (ASTM no.1)	+	Sodium aluminate	+
Acetone	+	Carbon dioxide (gas)	+	Freon-134a (R-134a)	+	Motor oil	+	Sodium bicarbonate	+
Acetonitrile	+	Carbon monoxide (gas)	+	Freon-22 (R-22)	+	Naphtha	+	Sodium bisulfite	+
Acetylene (gas)	+	Cellosolve	+	Fruit juices	+	Nitric acid, 10%	?	Sodium carbonate	+
Acid chlorides	?	Chlorine (gas)	?	Fuel oil	+	Nitric acid, 65%	?	Sodium chloride	+
Acrylic acid	+	Chlorine (in water)	-	Gasoline	+	Nitrobenzene	+	Sodium cyanide	+
Acrylonitrile	+	Chlorobenzene	+	Gelatin	+	Nitrogen (gas)	+	Sodium hydroxide	+
Adipic acid	+	Chloroform	+	Glycerine (Glycerol)	+	Nitrous gases (NOx)	?	Sodium hypochlorite (Bleach)	-
Air (gas)	+	Chloroprene	+	Glycols	+	Octane	+	Sodium silicate (Water glass)	+
Alcohols	+	Chlorosilanes	+	Helium (gas)	+	Oils (Essential)	+	Sodium sulfate	+
Aldehydes	+	Chromic acid	+	Heptane	+	Oils (Vegetable)	+	Sodium sulfide	?
Alum	?	Citric acid	+	Hydraulic oil (Glycol based)	+	Oleic acid	+	Starch	+
Aluminium acetate	?	Copper acetate	+	Hydraulic oil (Mineral type)	+	Oleum (Sulfuric acid, fuming)	-	Steam	+
Aluminium chlorate	?	Copper sulfate	+	Hydraulic oil (Phosphate ester based)	+	Oxalic acid	?	Stearic acid	+
Aluminium chloride	-	Creosote	+	Hydrazine	+	Oxygen (gas)	+	Styrene	+
Aluminium sulfate	+	Cresols (Cresylic acid)	+	Hydrocarbons	+	Palmitic acid	+	Sugars	+
Amines	+	Cyclohexane	+	Hydrochloric acid, 10%	-	Paraffin oil	+	Sulfur	+
Ammonia (gas)	+	Cyclohexanol	+	Hydrochloric acid, 37%	-	Pentane	+	Sulfur dioxide (gas)	+
Ammonium bicarbonate	+	Cyclohexanone	+	Hydrofluoric acid, 10%	-	Perchloroethylene	+	Sulfuric acid, 20%	-
Ammonium chloride	?	Decalin	+	Hydrofluoric acid, 48%	-	Petroleum (Crude oil)	+	Sulfuric acid, 98%	-
Ammonium hydroxide	+	Dextrin	+	Hydrogen (gas)	+	Phenol (Carbolic acid)	+	Sulfuryl chloride	-
Amyl acetate	+	Dibenzyl ether	+	Iron sulfate	+	Phosphoric acid, 40%	?	Tar	+
Anhydrides	+	Dibutyl phthalate	+	Isobutane (gas)	+	Phosphoric acid, 85%	?	Tartaric acid	?
Aniline	+	Dimethylacetamide (DMA)	+	Isocetane	+	Phthalic acid	+	Tetrahydrofuran (THF)	+
Anisole	+	Dimethylformamide (DMF)	+	Isoprene	+	Potassium acetate	+	Titanium tetrachloride	-
Argon (gas)	+	Dioxane	+	Isopropyl alcohol (Isopropanol)	+	Potassium bicarbonate	+	Toluene	+
Asphalt	+	Dipyl (Dowtherm A)	+	Kerosene	+	Potassium carbonate	+	2,4-Toluenediisocyanate	+
Barium chloride	?	Esters	+	Ketones	+	Potassium chloride	+	Transformer oil (Mineral type)	+
Benzaldehyde	+	Ethane (gas)	+	Lactic acid	?	Potassium cyanide	+	Trichloroethylene	+
Benzene	+	Ethers	+	Lead acetate	+	Potassium dichromate	?	Vinegar	+
Benzoic acid	+	Ethyl acetate	+	Lead arsenate	+	Potassium hydroxide	+	Vinyl chloride (gas)	+
Bio-diesel	+	Ethyl alcohol (Ethanol)	+	Magnesium sulfate	+	Potassium iodide	+	Vinylidene chloride	+
Bio-ethanol	+	Ethyl cellulose	+	Maleic acid	+	Potassium nitrate	+	Water	+
Black liquor	?	Ethyl chloride (gas)	+	Malic acid	?	Potassium permanganate	?	White spirits	+
Borax	+	Ethylene (gas)	+	Methane (gas)	+	Propane (gas)	+	Xylenes	+
Boric acid	+	Ethylene glycol	+	Methyl alcohol (Methanol)	+	Propylene (gas)	+	Xylenol	+
Butadiene (gas)	+	Formaldehyde (Formalin)	+	Methyl chloride (gas)	+	Pyridine	+	Zinc sulfate	+
Butane (gas)	+	Formamide	+	Methylene dichloride	+	Salicylic acid	+		
Butyl alcohol (Butanol)	+	Formic acid, 10%	?	Methyl ethyl ketone (MEK)	+	Seawater/brine	?		

All information and data quoted are based upon decades of experience in the production and operation of sealing elements. This data may not be used to support any warranty claims. With its publication this latest edition supersedes all previous issues and is subject to change without further notice.

Standard dimensions of sheets

Sheet size (mm): 1000 x 1000 | 1500 x 1500
 Thickness (mm): 0.5 | 1.0 | 1.5 | 2.0 | 3.0
 Other sizes and thicknesses available on request.

DONIT TESNIT, d.o.o.
 Cesta komandanta Staneta 38
 1215 Medvode, Slovenia
 Phone: +386 (0)1 582 33 00

Fax: +386 (0)1 582 32 06
 +386 (0)1 582 32 08
 Web: www.donit.eu
 E-mail: info@donit.eu



For disclaimer please visit <http://donit.eu/disclaimer>
 Copyright © DONIT TESNIT, d.o.o.
 All rights reserved
 Date of issue: 05.2018 / TDS-GSL-05-2018